



# REAR MOUNT HYDRAULIC SYSTEM BY LIV-POWR HYDRAULICS



DESIGNED FOR

**CATERPILLAR D5 D6 D7 D8 D9**

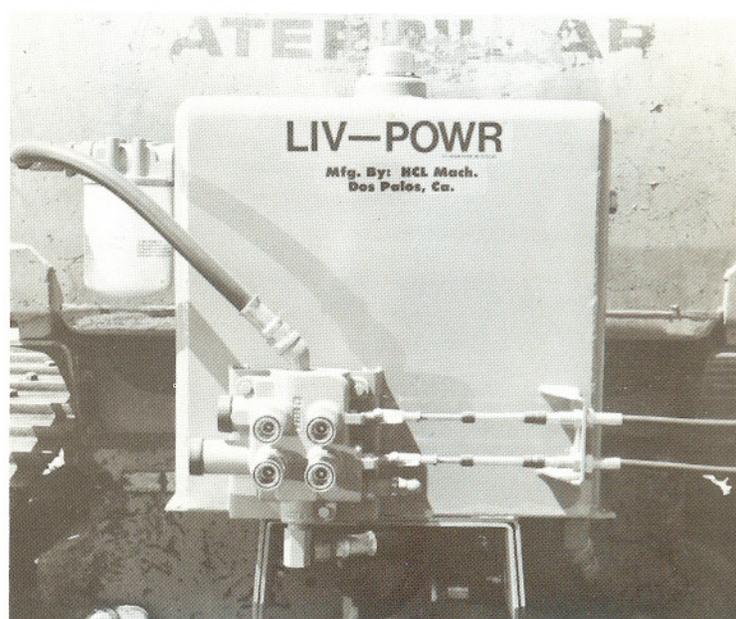

## VALVE

### CONFIGURATIONS

Standard: 2 spool valve,  
1 standard spool.  
1 float spool.

Optional: 3 spool valve and up,  
any combination of standard,  
float or detented sections.

PRESSURE RANGE 500 psi to 2000 psi

## PUMP

### TYPE

Gear

### CAPACITIES

15-21 gpm @ rated engine RPM

## FILTRATION

Fill Cap Breather	40 micron
Return Line Filter	10 micron
Fill Cap	24 mesh screen

## RESERVOIR

### DIMENSIONS

Height 25¼"  
Width 10½"  
Length 23"

### CAPACITY

20 gallons.

### LOCATION

At rear  
of tractor,  
PTO driven.

### CONSTRUCTION

Heavy-duty 10 gauge  
steel, die formed heads  
& shell.

2 Position Reservoir Mount will accommodate D5, through D9 Fuel Tank Interference.

Materials & specifications are subject to change without notice.  
All specifications are manufacturer's estimates.

**HCL Machine Works, Inc.**

Dos Palos  
California, 93620