


# REAR MOUNT HYDRAULIC SYSTEM

BY LIV-POWR HYDRAULICS

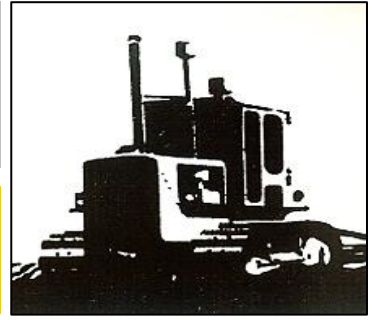

DESIGNED FOR  
**CATERPILLAR D4 D5 D6 D7 D8 D9**

**We're Your Repair Parts Headquarters For**



**LIV-POWR Replacement Parts**



**Parts Are In Stock For Immediate Shipment!**



**Pumps...Filters...Sight Glass**

**Breathers...Cables...Handles...Fill Caps!**



VALVE



PUMP



CONFIGURATIONS

Standard: 2 spool valve  
1 standard spool.  
1 float spool.

Optional: 3 spool valve and up  
Any combination of standard,  
Float or detented sections



FILTRATION

PRESSURE RANGE 500 psi to 2000 psi

TYPE

CAPACITIES

Gear 15-21 gpm @ rated engine RPM

RESERVOIR

DIMENSIONS

CAPACITY

LOCATION

CONSTRUCTION

Height 25-1/4"	20 gallons	At rear of tractor PTO driven	Heavy-duty 10 gauge steel die formed heads & shell.
----------------	------------	-------------------------------	---

2 Position Reservoir Mount will accommodate D4 through D9 Fuel Tank Interference.

**HCL Machine Works**

15142 Merrill Avenue, Dos Palos California 93620 USA

209/392.6103 Fax 209/392.3000

Web Site: [www.hclmachineworks.com](http://www.hclmachineworks.com) [www.compostturners.com](http://www.compostturners.com) Email: [sales@hclmachineworks.com](mailto:sales@hclmachineworks.com)

Materials & specifications are subject to change without notice. All specifications are manufacturer's estimates.